

# MAPELASTIC

Two-component cementitious mortar, flexible down to -20°C, for waterproofing balconies, terraces, bathrooms and swimming pools



## WHERE TO USE

Waterproofing and protection of concrete structures, renders and cementitious screeds.

### Some application examples

- Waterproofing of concrete basins used for containing water.
- Waterproofing bathrooms, showers, balconies, terraces, swimming pools, etc. before laying ceramic tile finishes.
- Waterproofing of plasterboard, render or cementitious surfaces, lightweight cement blocks and marine-grade plywood.
- Flexible smoothing layer for light-sectioned concrete structures, including those subjected to minor deformation when under load (e.g. pre-cast panels).
- Protection of renders or concrete with cracks caused by shrinkage, against the infiltration of water and aggressive atmospheric elements.
- Protection, against the penetration of carbon dioxide, of concrete pillars beams, road and railway viaducts repaired with products from the **Mapegrout** range, and structures with an insufficient layer of concrete covering on the reinforcement rods.
- Protection of concrete surfaces which may come into contact with seawater, de-icing salts, such as sodium or calcium chloride, and sulphates.

## ADVANTAGES

- Remains flexible at very low temperatures (-20°C).
- 30 years experience and more than 300 million m<sup>2</sup> of surfaces successfully waterproofed.
- CE-certified product in compliance with EN 1504-2 and EN 14891.
- Protects the surface of concrete from CO<sub>2</sub> penetration (carbonation) for more than 50 years.
- Resistant to UV rays.
- 2.5 mm of **Mapelastic** represents the equivalent of 30 mm of concrete against the aggressive action of chlorides (w/c ratio 0.45).
- May also be applied on existing coverings.
- Compatible with ceramic, mosaic and natural stone coverings.
- Product certified EC1 R Plus by the GEV Institute (Gemeinschaft Emissions-kontrollierte Verlegewerkstoffe, e.V.) as a product with very low emission of volatile organic compounds.

## TECHNICAL CHARACTERISTICS

**Mapelastic** is a two-component mortar based on cementitious binders, fine-grained selected aggregates, special admixtures and synthetic polymers dispersed in water, blended according to a formula developed in MAPEI's own research laboratories. When the two components are mixed together, a free-flowing mix is obtained which may be easily applied, even on vertical surfaces, at a thickness of up to 2 mm in one single coat.

Due to the high content and quality of the synthetic resins, the cured layer of **Mapelastic** remains constantly flexible under all environmental conditions and resistant to the chemical attack of de-icing salts, sulphates, chlorides and carbon dioxide.

**Mapelastic** has excellent bonding properties to all concrete, masonry, ceramic and marble surfaces, as long as they are sound and sufficiently clean.

This property, together with its resistance to the deteriorating effect of UV rays, a characteristic of this product, ensures that structures protected and waterproofed with **Mapelastic** have a long service life, even if they are located in areas with particularly difficult climatic conditions, in coastal areas with a saline rich atmosphere or industrial areas where the air is particularly polluted.

**Mapelastic** meets the requirements defined by EN 1504-9 ("*Products and systems for the protection and repair of concrete structures - Definitions, requirements, quality control and evaluation of conformity - General principles for the use of products and systems*") and the requirements claimed by EN 1504-2 coating (C) according to the PI, MC and IR principles ("*Protection systems for concrete surfaces*").

## RECOMMENDATIONS

- Do not use **Mapelastic** for thick coatings (more than 2 mm per coat).
- Do not apply **Mapelastic** at temperatures below +8°C.
- Do not add cement, aggregates or water to **Mapelastic**.
- Do not apply on substrates not up to the required standard.
- Do not apply on lightweight substrates.
- Protect from rain and water spillage for the first 24 hours after application.
- Do not apply **Mapelastic** on unprotected surfaces in swimming pools.
- During hot weather, it is advisable to keep the product out of direct sunlight (powder and liquid).
- After application, and in particularly dry, hot or windy weather, it is recommended to protect the surface from rapid evaporation by covering it with sheets.

## APPLICATION PROCEDURE

### Preparation of the substrate

**A) Protection and waterproofing of concrete structures and pre-cast units** (e.g. pillars and beams for road and railway viaducts, cooling towers, chimneys, underpasses, retaining walls, applications in coastal areas, basins, canals, faces of dams, columns, balcony fronts).

The surface to be treated must be sound and perfectly clean.

Remove all cement laitance, flaky parts and traces of powder, grease, oil and form release agents by sand-blasting, or wash down with high-pressure water jets.

If the structure to be waterproofed and protected with **Mapelastic** is in poor condition, remove the damaged parts by hand or mechanical abrasion or by using a hydro-demolition system or a hydro-scarifier.

The last two techniques, which use high-pressure water, are particularly recommended because the reinforcement rods are not damaged and the structures are not subject to vibration which could cause the onset of small cracks in adjacent concrete.

Once the rust has been completely removed by sandblasting, carry out the repair with a pre-blended mortar from the **Mapegrout** or **Planitop** range.

Absorbent surfaces to be treated with **Mapelastic** must be slightly dampened beforehand with water.

### B) Waterproofing terraces, balconies and swimming pools

- CEMENTITIOUS SCREEDS:
  - setting cracks or cracks caused by plastic or hygrometric shrinkage must be filled beforehand with **Eporip**;
  - if thicknesses of up to 30 mm have to be levelled out (to create slopes, fill in dips, etc.) use **Planitop Fast 330** or **Adesilex P4**.
- EXISTING FLOORS:

- existing floors and coverings in ceramic, porcelain tiles, clinker or terracotta, etc. must be well bonded to the substrate and free of substances which could compromise the bonding, such as grease, oil, wax, paint, etc. To remove material that could affect the adhesion of **Mapelastic**, clean the floor with a mixture of water and 30% caustic soda, then thoroughly rinse the floor with clean water to eliminate all traces of caustic soda.
- **RENDERS:**
  - cementitious renders must be sufficiently cured (7 days per mm of thickness in good weather conditions), well bonded to the substrate, resistant and free from all dust and paint;
  - dampen absorbent surfaces to be treated beforehand with water.

### Close up of the waterproofing layer

In the waterproofing sector, more than in any other sector, it is essential that particular attention is paid to details, which alone are capable of making a difference.

This is why it is essential to use products from the **Mapeband** and **Drain** lines in combination with **Mapelastic**.

**Mapeband TPE** is used to seal structural joints and joints subject to high dynamic stress, **Mapeband**, **Mapeband Easy** and **Mapeband SA** are used to waterproof check joints, fillet joints between horizontal and vertical elements and special kits from the **Drain** range are used to seal drain holes.

It is imperative that special care is in these critical areas after levelling and cleaning the substrate and before applying the cementitious waterproofing mortar.

### Preparation of the mortar

Pour component B (liquid) into a suitable, clean container, then slowly add component A (powder) while stirring with a mechanical mixer.

Carefully mix **Mapelastic** for a few minutes, making sure that no powder remains stuck to the sides or the bottom of the container.

Keep stirring until a perfectly homogenous mix is obtained.

Use a low-speed mechanical mixer for this operation to avoid too much air being dragged into the mix.

Do not prepare the mix by hand.

Preparation of **Mapelastic** may also be carried out with a mortar mixer, which is usually supplied with mortar sprayers.

If this technique is used, make sure that the mix is homogenous and has no lumps before it is poured into the hopper of the pump.

### Manual application of the mortar

Apply **Mapelastic** within 60 minutes of mixing.

Skim the prepared surface to a feather edge with a thin layer of **Mapelastic** with a smooth trowel then, while the first coat is still fresh, apply a second coat to form a final thickness at least 2 mm thick.

When waterproofing terraces, balconies, basins and swimming pools, we recommend embedding **Mapenet 150** alkali-resistant reinforcement mesh in the first coat of **Mapelastic** while it is still wet.

The mesh must also be used in areas with either small cracks or in areas which are under particular stress. After the mesh has been laid, finish off the surface with a flat trowel and apply a second layer of **Mapelastic** when the first one has set (after 4-5 hours).

After applying **Mapelastic**, wait 5 days for curing before laying ceramic tiles.

In favourable climatic conditions and with good temperatures this period may be reduced to 24 hours on dry substrates.

### Laying ceramic tiles on Mapelastic

- **BALCONIES AND TERRACES:**
  - bond in place using a C2 class cementitious adhesive such as **Keraflex** or **Keraflex Maxi S1** or, for more rapid setting, a C2F class adhesive such as **Granirapid** or **Ultralite S1 Quick**.
  - grout the joints with a CG2 class cementitious product such as **Keracolor FF** or **Keracolor GG** mixed with **Fugolastic** or **Ultracolor Plus**;
  - seal the movement joints with a special MAPEI elastic sealant (such as **Mapeflex PU 45 FT**, **Mapesil AC** or **Mapesil LM**. Other types of sealant may be required for specific service conditions: please refer to the MAPEI Technical Services Department).
- **SWIMMING POOLS:**
  - bond ceramic tiles in place using a C2 class cementitious adhesive (**Keraflex** or **Keraflex Maxi S1**) or a C2F class rapid adhesive (**Granirapid** or **Ultralite S1 Quick**). For mosaic, on the other hand, use **Adesilex P10 + Isolastic** mixed with 50% water (class C2E/S1).

- grout the joints with a CG2 class cementitious product (**Keracolor FF/Keracolor GG** mixed with **Fugolastic** or **Ultracolor Plus**) or with an RG class epoxy product (of the **Kerapoxy** range of product);
- seal the joints with **Mapesil AC** silicone sealant.

### Application of the mortar by spraying

After preparing the surface (see paragraph on “Preparation of the substrate”), apply **Mapelastic** with a spray gun with a lance fitting suitable for use with smoothing mortars, at a minimum thickness not less than 2 mm per layer.

If a thicker layer is required, **Mapelastic** must be applied in several coats.

Successive coats must only be applied when the previous one is dry (after 4-5 hours).

In areas with small cracks or which are highly stressed, insertion of **Mapenet 150** in the first layer of fresh **Mapelastic** is recommended.

Immediately after laying the mesh, **Mapelastic** must be smoothed off with a flat trowel.

If the mesh needs to be encapsulated, a further layer of **Mapelastic** may be applied with a spray gun.

When **Mapelastic** is used for protecting beams and columns on bridges, railway underpasses and façades on buildings etc., the product may be painted using products from the **Elastocolor** range, which are acrylic resin-based water dispersions and are available in a wide range of colours which may be obtained using the **ColorMap®** automatic colouring system.

If **Mapelastic** is used, on the other hand, to protect horizontal surfaces not used for foot traffic such as flat roofs, it may be painted over with **Elastocolor Waterproof** acrylic resin-based flexible paint in water dispersion.

**Elastocolor Waterproof** is available in a wide range of colours obtained using the **ColorMap®** automatic colouring system and must be applied at least 20 days after applying **Mapelastic**.



Waterproofing screeds with **Mapelastic** and **Mapeband**



Installing ceramic with **Kerabond + Isolastic**



Private terrace, **Cereseto (Alessandria)** - Italy



Application of **Drain Vertical** on **Mapelastic**



Laying **Mapelastic** on **Mapenet 150**




Laying **Granirapid** on a terrace waterproofed with **Mapelastic**



Waterproofing a swimming pool with Mapelastic




Laying ceramic tiles on Mapelastic in a swimming pool

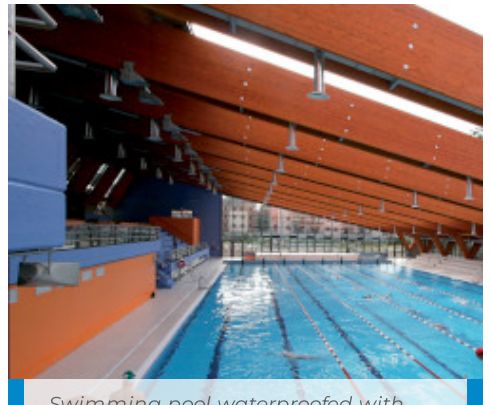

Swimming pool waterproofed with Mapelastic: Scarioni Leisure Centre - Milan - Italy



Example of Mapelastic applied on a viaduct by spraying

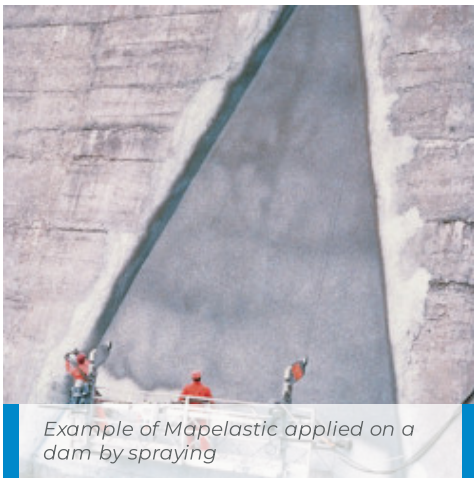

Example of Mapelastic applied on a dam by spraying

## TECHNICAL PERFORMANCE DATA

The technical data table contains the identification and application data for the product. Figures 1, 2, 3 and 4 illustrate some of **Mapelastic's** characteristics.

Figure 1 shows the load diagram for evaluating the product's crack-bridging capacity. The sample to which **Mapelastic** was applied, on the underside of the beam, is subjected to increasing loads in the middle. The crack-bridging capacity of **Mapelastic** is determined by measuring the maximum width of the crack in the concrete at the moment **Mapelastic** fractures.

The degree of protection offered by **Mapelastic** to the concrete substrate is not limited to a simple "covering" of subsequent cracks provoked by heavy loads, shrinkage, temperature variations, etc. **Mapelastic** itself is also very resistant to chemical attack, as illustrated by the results of the following tests, and offers good protection for the concrete against carbonation and, therefore, subsequent corrosion of the reinforcing rods.

Figure 2 is a graph which compares accelerated carbonation (in an atmosphere of air enriched with 30% of CO<sub>2</sub>), and shows how **Mapelastic** is completely impermeable to this aggressive substance. The **Mapelastic** membrane also protects the concrete from the action of sodium chloride (for example seawater).

Figure 3 shows how **Mapelastic** completely blocks infiltration of salt into the concrete which is, in itself, very porous and may be easily penetrated. **Mapelastic** also provides an impenetrable barrier against calcium chloride (CaCl<sub>2</sub>) based de-icing salts, which have a destructive action on even the highest quality concrete. Figure 4 shows the reduction in mechanical resistance (initially 65 N/mm<sup>2</sup>) of concrete permanently immersed in a solution of 30% CaCl<sub>2</sub>. In this case, too, **Mapelastic** offers efficient protection of the concrete, and prevents the salt from carrying out its aggressive and destructive action on the concrete.

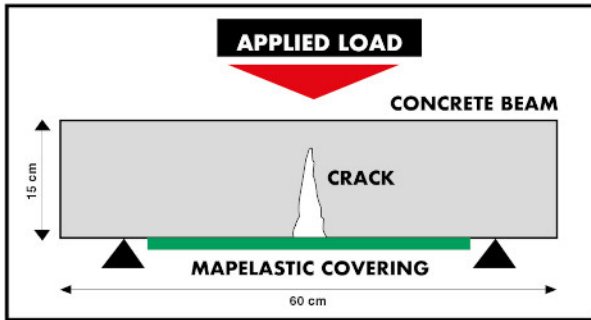


Fig.1: Protection of a hairline crack with **Mapelastic** on the outside of a concrete beam subject to flexural stress

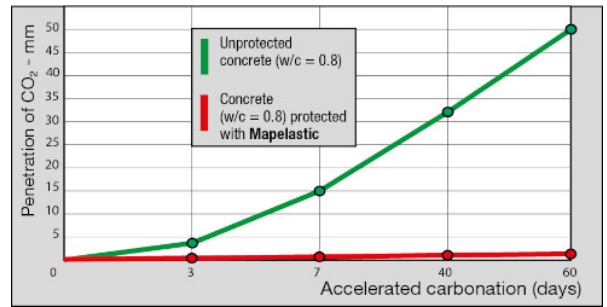


Fig. 2: Protection of **Mapelastic** against accelerated carbonation (30% of CO<sub>2</sub>) on porous concrete

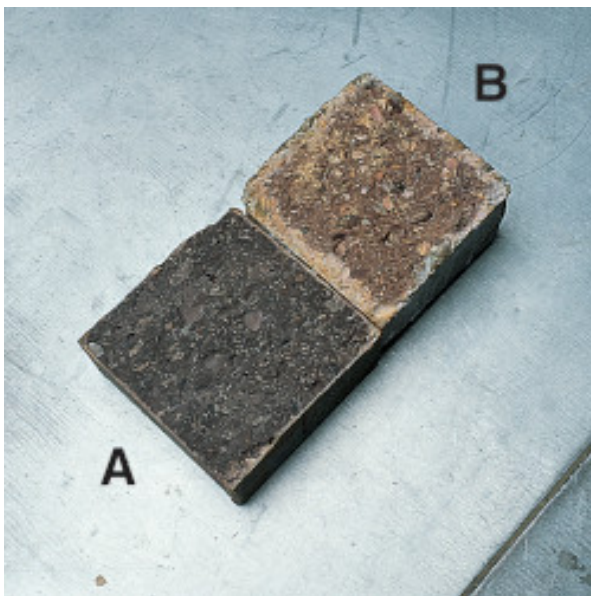


Fig. 2 B - Penetration test of chloride ions (UNI 9944). Sample A covered with **Mapelastic** is not penetrated; sample B, left uncoated, shows an advanced penetration of many mm

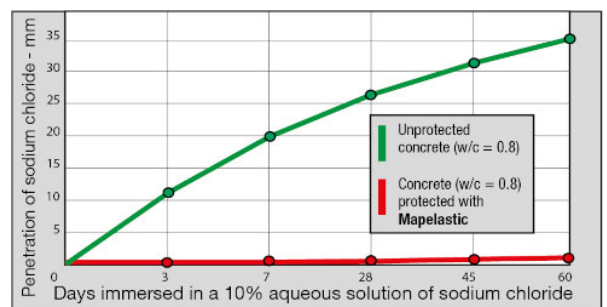


Fig.3: Protection of **Mapelastic** against penetration of sodium chloride on porous concrete

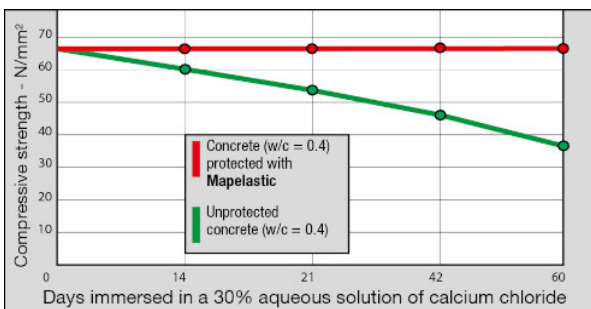


Fig.4: Protection of **Mapelastic** against the decrease in mechanical strength of concrete caused by calcium chloride-based de-icing salts

## CLEANING

Due to the high bonding strength of **Mapelastic**, even on metals, it is recommended to wash work tools with water before the mortar sets. Once it has set, cleaning may only be carried out by mechanical means.

## CONSUMPTION

Manual application:  
approx. 1.7 kg/m<sup>2</sup> per mm of thickness.  
Spray gun application:  
approx. 2.2 kg/m<sup>2</sup> per mm of thickness.

**NB:** the consumption figures indicated are for a seamless film applied on a flat surface and will be higher on uneven surfaces.

## PACKAGING

Units of 32 kg:

- component A: 24 kg bags:
- component B: 8 kg tanks.

Upon request, component B may also be supplied in 1000 kg tanks and component A in 24 kg light colour bags.

Units of 16 kg:  
2 6 kg bags and 1 4 kg drum.

## STORAGE

**Mapelastic** component A may be stored for up to 12 months in its original packaging.

The product complies with the conditions of Annex XVII to Regulation (EC) N° 1907/2006 (REACH), item 47.

**Mapelastic** component B may be stored up to 24 months.

Store **Mapelastic** in a dry place and at a temperature of at least +5°C.

## SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

**Mapelastic** component A contains cement that when in contact with sweat or other body fluids causes irritant alkaline reaction and allergic reactions to those predisposed.

It can cause damage to eyes.

**Mapelastic** component B is not considered dangerous according to the current regulation regarding the classification of mixtures. During use wear protective gloves and goggles and take the usual precautions for the handling of chemicals. In case of contact with eyes or skin wash immediately with plenty of clean water and seek medical attention.

For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

**Mapelastic: two-component flexible cementitious membrane for waterproofing balconies, terraces, bathrooms, swimming pools and for protecting concrete in compliance with the requirements of EN 14891 and EN 1504-2, EN 1504-9 coating (C) principles PI, MC and IR**

### TECHNICAL DATA (typical values)

#### PRODUCT IDENTITY

	comp. A	comp. B
Consistency:	powder	liquid
Colour:	grey	white
Bulk density (g/cm <sup>3</sup> ):	1.4	–
Density (g/cm <sup>3</sup> ):	–	1.1

Dry solids content (%):	100	50
<b>APPLICATION DATA OF PRODUCT (at +20°C - 50% R.H.)</b>		
Colour of mix:	grey	
Mixing ratio:	component A : component B = 3 : 1	
Consistency of mix:	plastic, trowelable	
Density of mix (kg/m <sup>3</sup> ):	1,700	
Density after application by spray (kg/m <sup>3</sup> ):	2,200	
Application temperature range:	from +8°C to +35°C	
Pot life of mix:	1 hour	
EMICODE:	EC1 R Plus - very low emission	

**FINAL PERFORMANCE (thickness 2.0 mm)**

Performance characteristic	Test method	Requirements according to EN 1504-2 coating (C) principles PI, MC and IR	Performance figures for Mapelastic	
Adhesion to concrete - after 28 days at +20°C and 50% R.H. (N/mm <sup>2</sup> ):	EN 1542	For flexible systems with no traffic: ≥ 0.8 with traffic: ≥ 1.5	1.0	
Thermal compatibility to freeze/thaw cycles with de-icing salts, measured as adhesion (N/mm <sup>2</sup> ):			0.8	
Adhesion to concrete - after 7 days at +20°C and 50% R.H. + 21 days in water (N/mm <sup>2</sup> ):			0.6	
Elasticity expressed as elongation - after 28 days at +20°C and 50% R.H. (%):	DIN 53504 modified	not required	30	
Static crack-bridging at -20°C expressed as maximum crack width (mm):	EN 1062-7	from class A1 (0.1 mm) to class A5 (2.5 mm)	class A3 (-20°C) (> 0.5 mm)	
Dynamic crack-bridging at -20°C of a film of Mapelastic reinforced with Mapetex Sel, expressed as resistance to cracking cycles:		from class B1 to class B4.2	class B3.1 (-20°C) No failure of the test piece after 1,000 crack cycles with movement of crack from 0.10 to 0.30 mm	
Permeability to water vapour - equivalent thickness of air S <sub>D</sub> (m):	EN ISO 7783-1	class I: S <sub>D</sub> < 5 m (permeable to vapour)	S <sub>D</sub> = 2.4	μ = 1200
Impermeability to water, expressed as capillary absorption (kg/m <sup>2</sup> ·h <sup>0.5</sup> ):	EN 1062-3	< 0.1	< 0.05	



Permeability to carbon dioxide (CO <sub>2</sub> ) - diffusion in equivalent air layer thickness S <sub>DCO<sub>2</sub></sub> (m):	EN 1062-6	> 50	> 50
Reaction to fire:	EN 13501-1	Euroclass	C, s1-d0
		<b>Requirements according to EN 14891</b>	<b>Performance figures for Mapelastic</b>
Impermeability to water under pressure (1.5 bar for 7 days of positive lift):	EN 14891-A.7	no penetration	no penetration
Crack-bridging ability at +23°C (mm):	EN 14891-A.8.2	≥ 0.75	0.9
Crack-bridging ability at -20°C (mm):	EN 14891-A.8.3	≥ 0.75	0.8
Initial adhesion (N/mm <sup>2</sup> ):	EN 14891-A.6.2	≥ 0.5	0.8
Adhesion after immersion in water (N/mm <sup>2</sup> ):	EN 14891-A.6.3	≥ 0.5	0.55
Adhesion after application of heat source (N/mm <sup>2</sup> ):	EN 14891-A.6.5	≥ 0.5	1.2
Adhesion after freeze-thaw cycles (N/mm <sup>2</sup> ):	EN 14891-A.6.6	≥ 0.5	0.6
Adhesion after immersion in basic water (N/mm <sup>2</sup> ):	EN 14891-A.6.9	≥ 0.5	0.6
Adhesion after immersion in chlorinated water (N/mm <sup>2</sup> ):	EN 14891-A.6.8	≥ 0.5	0.55



## WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website [www.mapei.com](http://www.mapei.com)

## LEGAL NOTICE

---

*The contents of this Technical Data Sheet (“TDS”) may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the MAPEI product installation.*

*The most up-to-date TDS can be downloaded from our website [www.mapei.com](http://www.mapei.com).*

**ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF MAPEI.**

**331-7-2018-gb**

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

